


# LAPTOP POWER BANK

RC-P72000-01

➤ **Manual**

1

## FUNCTIONS

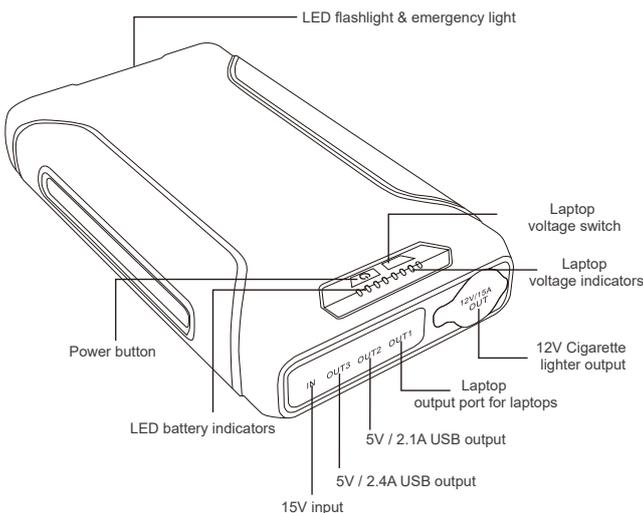

### CHARGING POWER BANK

Use the included AC adaptor to connect the power bank and AC power supply.

Please use the included AC adaptor only. Using an adaptor from a third party is not recommended and will void the warranty.

3

## SPECIFICATIONS

- Capacity: 266Wh/22.2Ah@12V/72000mAh@3.7V
- AC adaptor input: 100-240V
- Input: 15V / 2A Max
- USB output: DC 5V / 2.1A, DC 5V / 2.4A
- Cigarette lighter output: 12V / 15A Max
- Output for laptops: 12V / 4A, 16V / 4A, 19V / 3.5A, 21V / 3.2A
- Size: 8.7 x 5 x 1.8 inch
- N.W: 2.8 lb

## PACKAGE INCLUDES

- Power bank
- AC adaptor
- Manual
- Laptop power cable
- Laptop power adaptors

2

### LED BATTERY INDICATORS

From left to right:

- The 1st LED blinks: the power level is below 25%
- The 2nd LED blinks: the power level is within 25%~50%
- The 3rd LED blinks: the power level is within 50%~75%
- The 4th LED blinks: the power level is within 75%~99%
- All LED indicators stay solid when the power bank is fully charged.

### CIGARETTE LIGHTER

Use the cigarette lighter port to power devices under 150W, such as car refrigerators, tire inflators, outdoor camping lights, flash lights, etc.

### USB PORTS

Compatible with mobile phones, tablets, digital cameras, and other 5V USB-enabled devices.

### LAPTOP POWER SOURCE

- **WARNING:** please check the power requirement of your laptop.
- Choose the power adaptor that is compatible with your laptop.
- Press the power button once to turn on the power bank and use the voltage switch to select the desired voltage.
- Use the power cable to connect the power bank and your laptop.

4

## LED FLASHLIGHT & EMERGENCY LIGHT

- Press the power button once to turn on the LED battery indicators and check the power level.
- Double tap the power button to turn on/off the LED flashlight when indicators stay lit.
- Long press the power button for three seconds to turn on/off the LED emergency light.

The power bank has built-in protection, which will be activated when the output power is over 150W. To get out of the protection mode, unplug all connected devices and use the AC adaptor to charge the power bank.

## MAINTENANCE

- To prevent battery capacity of the power bank from decreasing, please unplug the AC plug after a full charge.
- Keep the product away from extreme ambient temperatures, flammable substances, or damp places.
- Let your power bank complete a full charge cycle every four months to prevent battery lifespan from shortening.
- Store your power bank half-charged (power level: 50%) is recommended when you store it long term.
- Do not charge and discharge your power bank simultaneously, which may damage the battery and shorten its lifespan.
- Avoid exposing your device to ambient temperatures higher than 104°F or lower than 32°F, which can permanently damage battery capacity.

5

## NOTES

### OPERATING TEMPERATURE

Operating temperature	0 ~ +40°C +32 ~ +104°F	Charge
	-20 ~ +60°C -4 ~ +140°F	Discharge

### STORAGE TEMPERATURE

Storage temperature	-20 ~ +45°C -4 ~ +113°F	Less than 1 month
	-20 ~ +35°C -4 ~ +95°F	Less than 6 months
	+15 ~ +25°C +59 ~ +77°F	Recommended

7

## FAQ

### ■ Can I use four output ports at the same time?

No. We advise you not to use the output port for laptops and output port for cigarette lighter simultaneously. However, you can use the USB ports with the output port for laptops or cigarette lighter at the same time.

### ■ Why does my power bank fail to recharge itself?

Check the connection between power bank, AC adaptor and AC power supply. The AC power supply needs to be 100-240V.

### ■ Why does the power bank not charge other devices?

Check the connection between power bank, cable and devices. Make sure the voltage and current output meet the requirements of devices.

### ■ Can I recharge the power bank when it is charging other devices?

We advise you not to charge and discharge your power bank simultaneously, which may damage the battery and shorten its lifespan.

### ■ Can I use solar panels to charge this power bank?

This laptop power bank can be charged by solar panels, but make sure the output of the solar panel is 15V / 2A.

6

## WARRANTY

- RENOGY products are covered by a 12-month limited warranty from the original purchase date. If any problems occur, please contact our support team.
- We only provide after-sales services for products that are sold by RENOGY or retailers and distributors authorized by RENOGY. If you have purchased your unit from other channels, please contact your seller for more information about return and warranty.

## CUSTOMER SUPPORT

For any questions or concerns about this product, please give us a call at 1-800-330-8678 or send us an email at [customerservice@renogy.com](mailto:customerservice@renogy.com).

FCC Compliance:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must withstand any interference received, including interference that may cause undesired operation.



8